



## PHOTOMETRIC DATA

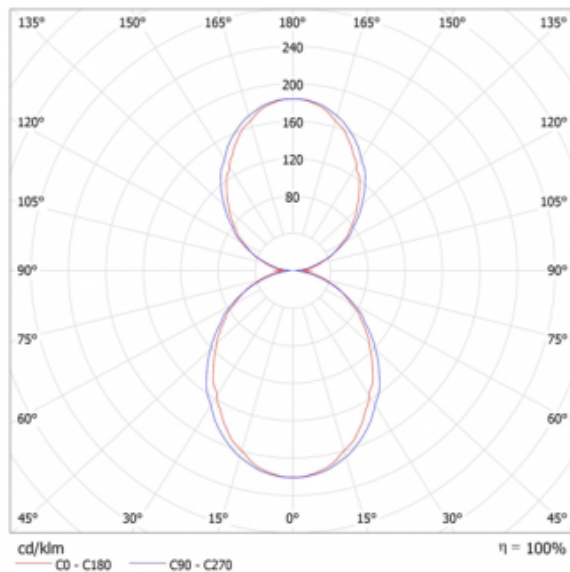

## GENERAL DIMENSIONS

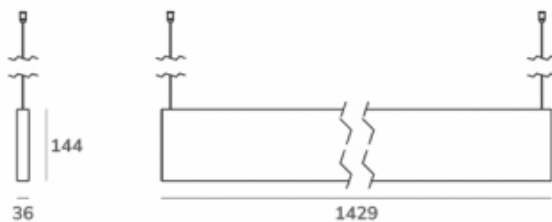

\* other colors or finishes available on request

<b>Application</b>	Ceiling	<b>Light Colour</b>	3000K
<b>Mounting</b>	Suspended	<b>Light Source</b>	Led
<b>Power (W)</b>	82W	<b>Optic</b>	99°
<b>CRI</b>	80	<b>Control</b>	On/ Off
<b>Insulation Rating</b>	Class I	<b>IK Rating</b>	IK03
<b>IP Rating</b>	IP20	<b>Weight (kg)</b>	5.100kg
<b>Product Shape</b>	Rectangular	<b>Size (mm)</b>	1429x36x144
<b>Lumen (Lm)</b>	5445Lm	<b>Produced Light</b>	DIR/ IND

## GENERAL DESCRIPTION

The modular system LINE V SU is composed of suspended application solutions with a standard vertical profile. Ideal solutions for direct, direct and indirect or indirect lighting. The modular system LINE V SU provides to the user a pleasant and comforting ambient light, both in individual modules and in continuous-line systems with diffused light.

## TECHNICAL DESCRIPTION

Luminaire with 1429x36x144mm dimensions. Body in extruded aluminum electrostatically thermally colored or anodized, and polymethylmethacrylate opal optics for a greater mechanical resistance, also guaranteeing a continuous light without visible points. System of suspension by cables of steel easily adjustable in height. The high quality, high durability light source has an estimated life of 50,000 hours at L80B10 for a  $T_a=25^\circ\text{C}$  (according to IESNA LM 80-08 and TM 21-11) and a color stability of 3 SCDM for a color temperature 3000K and an IRC greater than 80% with a 99° optic aperture. This allows a flow of 5445lm, associated with a consumption of 82W, and the luminaire has an overall efficiency of 66lm/W. At security level, this is an insulation Class I luminaire, IP20 and IK03. The luminaire has a total weight of 5.100kg. This model does not allow adjustment.

## MOUNTING

Suspended mounting luminaire.

## INSTALLATION

Simple, suspended mounting luminaire. The overall dimensions of the appliance are 1429x36x144mm. You should refer to the equipment installation manual.

## COLOR

RAL 9011  
RAL 9003

XX - BR=White; PT=Black; AN=Anthracite  
\* other colors or finishes available on request

## INTENDED USE

Luminaire for various uses such as hotel, residential, offices and others.