





PHOTOMETRIC DATA

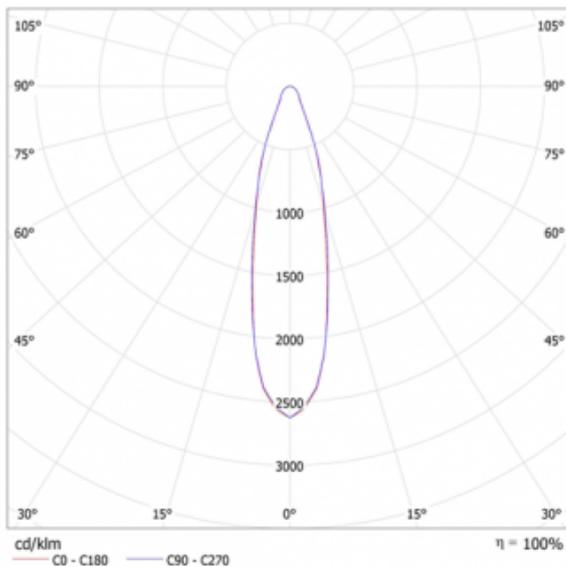

GENERAL DIMENSIONS

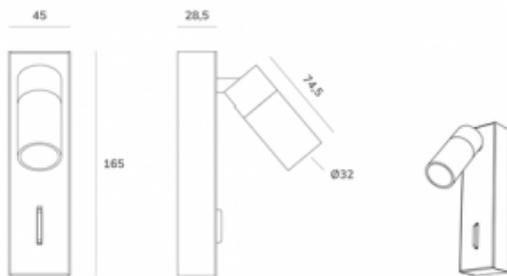

* other colors or finishes available on request

Application	Wall	Light Colour	2700K
Mounting	Surface	Light Source	Led
Power (W)	5W	Optic	25°
CRI	80	Insulation Rating	Class I
IP Rating	IP20	Weight (kg)	0.460Kg
IK Rating	IK03	Product Shape	Cylindrical
Lumen (Lm)	270Lm	Produced Light	DIR
Size (mm)	45x165+Ø32x74,5	Voltage	230V 50Hz

GENERAL DESCRIPTION

Small wall light for use in bed headboards, it allows a two axes rotation, with a strong mechanical strength. Comes equipped with switch.

TECHNICAL DESCRIPTION

Surface luminaire that allows a rotation of 340 degrees in the horizontal axis and 90 degrees in the vertical axis, with the dimensions 45x165+Ø32x74,5mm. Main body in electrostatically thermo-coated aluminum and PMMA optics. The high quality, high durability light source has an estimated life of 60,000 hours at L80B10 for a Ta=25°C (according to IESNA LM 80-08 and TM 21-11) and a color stability of 5 SCDM for a color temperature of 2700K and an IRC of more than 80% with an optic of 25°. It allows a flow of 270lm, associated with a consumption of 5W, and the luminaire has an overall efficiency of 54lm/W. At security level, this is an insulation class I luminaire, IP20 and IK03. The luminaire has a total weight of 0.460kg. This model does not allow adjustment.

MOUNTING

Surface mounting luminaire.

INSTALLATION

Surface mount luminaire. The dimensions of the device are 45x165+Ø32x74,5mm. You should refer to the equipment installation manual. The light source contained in this luminaire shall only be replaced by the manufacturer, or its service agent, or a similar qualified person.

COLOR

RAL 9011

RAL 9003

* other colors or finishes available on request

INTENDED USE

Decorative lighting for different uses such as hotels, residences and others.