




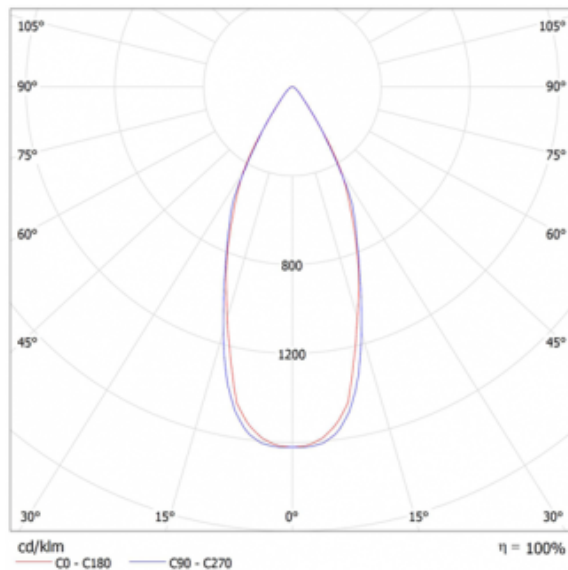

## PHOTOMETRIC DATA



## GENERAL DIMENSIONS

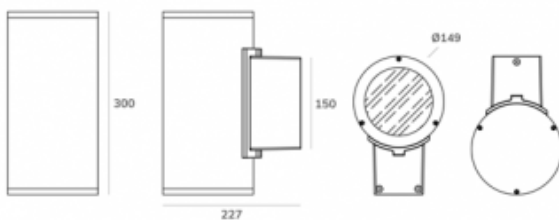

\* other colors or finishes available on request

<b>Application</b>	Wall	<b>Light Colour</b>	3000K
<b>Mounting</b>	Surface	<b>Light Source</b>	Led
<b>Power (W)</b>	26W	<b>Optic</b>	43°
<b>CRI</b>	70	<b>Control</b>	On/ Off
<b>Insulation Rating</b>	Class I	<b>IK Rating</b>	IK07
<b>IP Rating</b>	IP65	<b>Weight (kg)</b>	5.000kg
<b>Product Shape</b>	Cylindrical	<b>Size (mm)</b>	Ø149x227x300
<b>Lumen (Lm)</b>	2385Lm	<b>Produced Light</b>	DIR

## GENERAL DESCRIPTION

TOP luminaire was designed with a minimalist concept and with the main objective of providing a highlight lighting, together with a high robustness.

## TECHNICAL DESCRIPTION

Luminaire with dimensions Ø149x227x300mm for surface mounting. Electrostatically painted aluminum body in color and optics in polycarbonate protected by tempered glass, thus guaranteeing a high resistance. The light source of high quality and durability has an estimated lifetime of 100,000 hours at L80B10 for a Ta=25°C (according to IESNA LM 80-08 and TM 21-11) for a color temperature of 3000K and an IRC 70%, with a color stability of 5 SCDM, with a 43° optic, and with a direct light generated component. It thus allows a flow of 2385lm, associated with a consumption of 26W, and the luminaire has an overall efficiency of 92lm/W. At security level, this is an insulation class I luminaire, IP65 and IK07. The luminaire has a total weight of 5.000kg.

## MOUNTING

Surface mounting luminaire.

## INSTALLATION

Surface mount luminaire. The dimensions of the device are Ø149x227x300mm. You should refer to the equipment installation manual. The light source contained in this luminaire shall only be replaced by the manufacturer, or its service agent, or a similar qualified person.

## COLOR

XX

BR:White PT:Black AN:Anthracite AL:Aluminum

## INTENDED USE

Luminaire for indoor or outdoor use. Assembly and installation, always respecting the applicable national legislation.